

ULTRA-ZONE[®]

Forced Air Zone Controls

SUBMITTAL SHEET

Model XM-2
Expansion Module

SPECIFICATIONS

INPUT VOLTAGE: 19-30VAC 60 Hz
Supplied via bus cable from BMPlus3000.

CURRENT DRAW: Max 7 VA @ 24VAC.


OVER-CURRENT PROTECTION: 4.0 amp
or 96 VA. *Protected via BMPlus3000.*

WIRING: 18 gauge Solid copper wire. Do not
use Stranded or Shielded Cable.

TEMPERATURE: -20° to 160°F (-29° to
71°C).

HUMIDITY: 0% - 95% RH Non-Condensing.

DIMENSIONS:

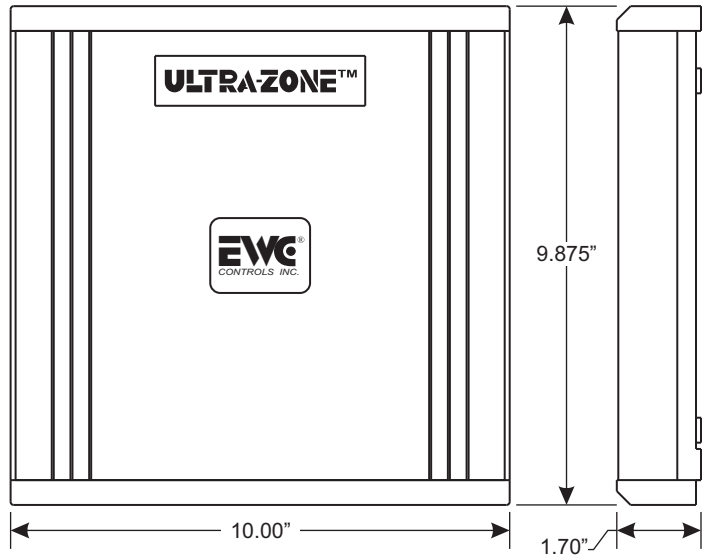

FEATURES

NUMBER OF ZONES:

Provides 2 additional zones for the Model BMPlus3000. A total of 2 Model XM-2 expansion Modules can be utilized to add up to 4 additional zones.

COMPATIBLE THERMOSTATS:

Any single stage Heat/Cool Thermostat or 2 Stage Heat, 1 Stage cool Heat Pump Thermostat.

COMPATIBLE DAMPERS:

EWC Models URD, ND, RSD and SID. Any 24vac 3 Wire or 2 Wire damper.

ADDITIONAL FEATURES:

*On Board LED's indicate system operation.

REQUIREMENTS:

Must be used to expand a current BMPlus3000 or BMPlus5000 system. Cannot be used as a Stand-alone solution or with older BM2000 or BMPlus2000 systems.



385 Hwy. 33
Englishtown, NJ 07726
Ph: 800-446-3110
Fx: 732-446-5362

P/N 090377A0143 REV. A

Copyright © EWC Controls 2006-2008 All Rights Reserved

SUBMITTAL FORM

SUBMITTED BY: _____

JOB: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

LOCATION: _____